

COLLECTION

SO HO


RIALTO
porcellanato

RIALTO
porcellanato



RIALTO
porcellanato

SO HO

Sizes

60x120
15x120
60x60
30x60

Brick
30x60
Mosaic
30x30

Finish

Natural
Lappato

SOH SNW06N

SOH BEI07N

SOH STE08N

SOH GPH09N

RIALTO

Floor
SOH SNW06N 60x60cm

SO
HO



Floor
SOH GPH09N 60x60cm

Wall
SOH GPH09N 30x60cm



Balanced and peaceful spaces

Wall
SOH BEI07N 30x60cm



RIALTO

Floor

SOH SNW06N 15x120cm
SOH BEI07N 15x120cm
SOH STE08N 15x120cm
SOH GPH09N 15x120cm

Wall

SOH SNW06N 15x120cm
SOH BEI07N 15x120cm
SOH STE08N 15x120cm
SOH GPH09N 15x120cm

SO HO



Urban mood to every interior

RIALTO

Floor
SOH BEI07N 30x60cm




SO
HO



Balanced and peaceful spaces


Floor
SOH SNW06N 60x60cm

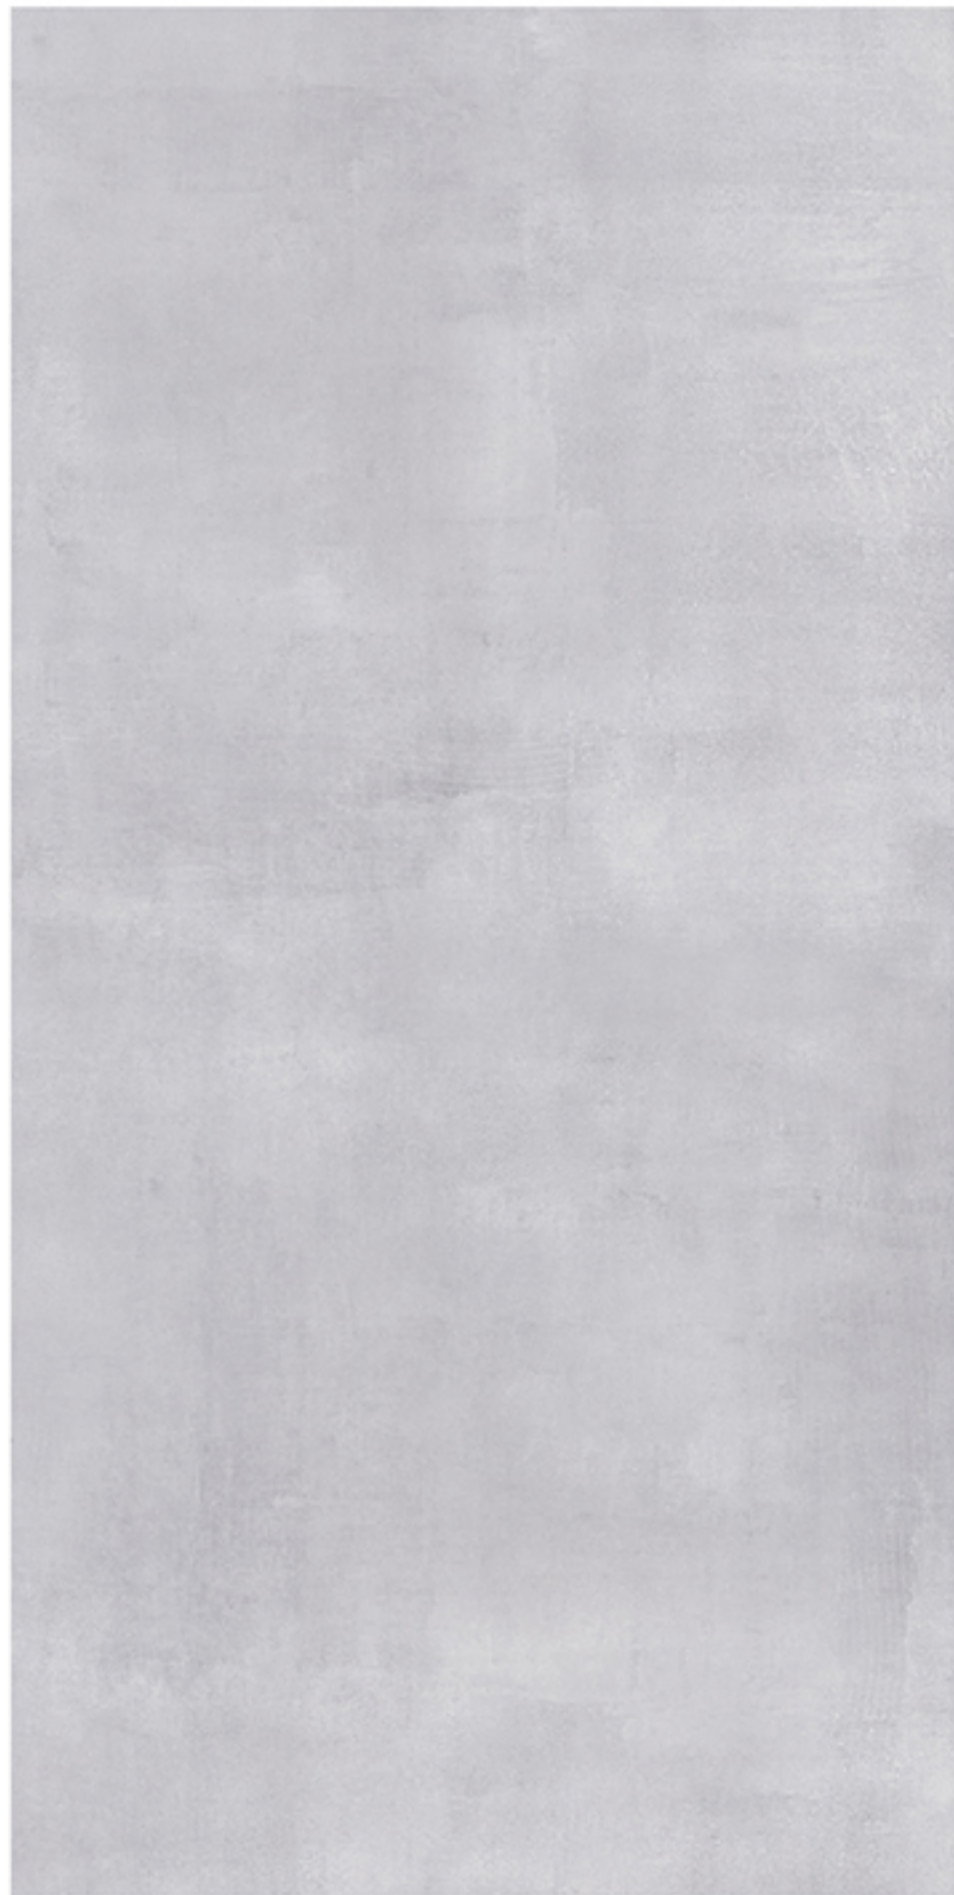

60x120cm



15x120cm

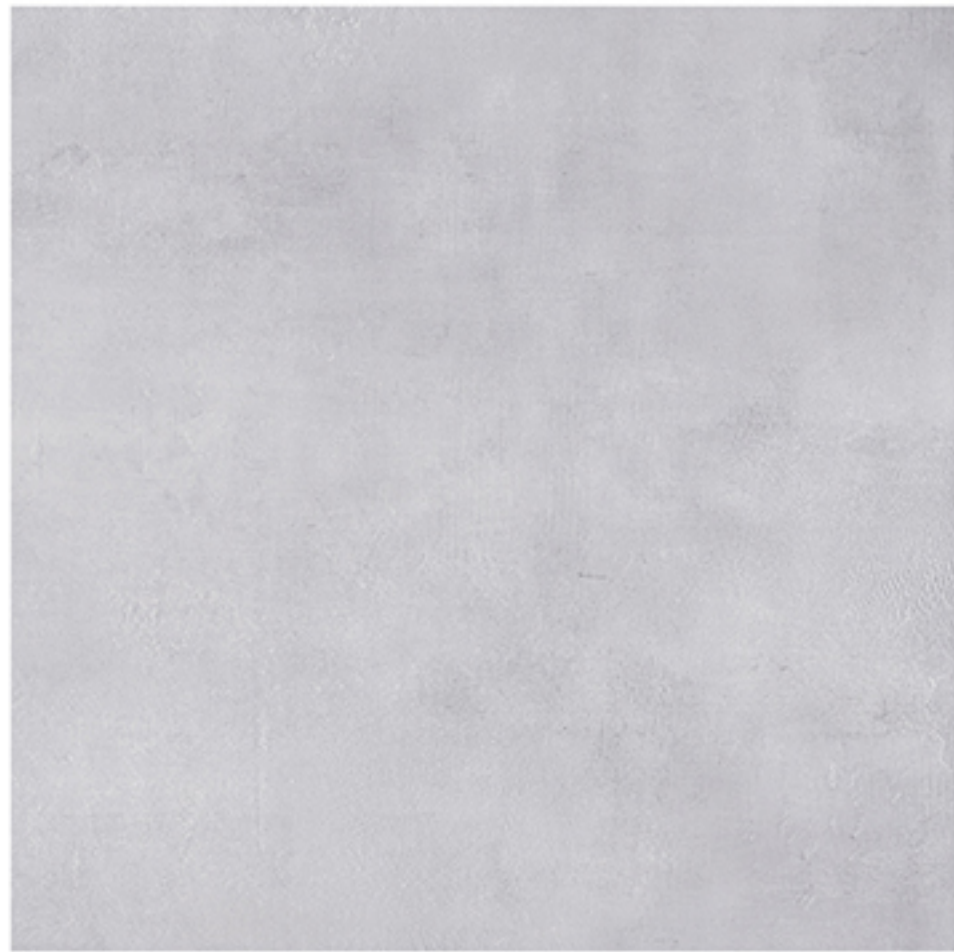

60x60cm




30x60cm



60x120cm



15x120cm

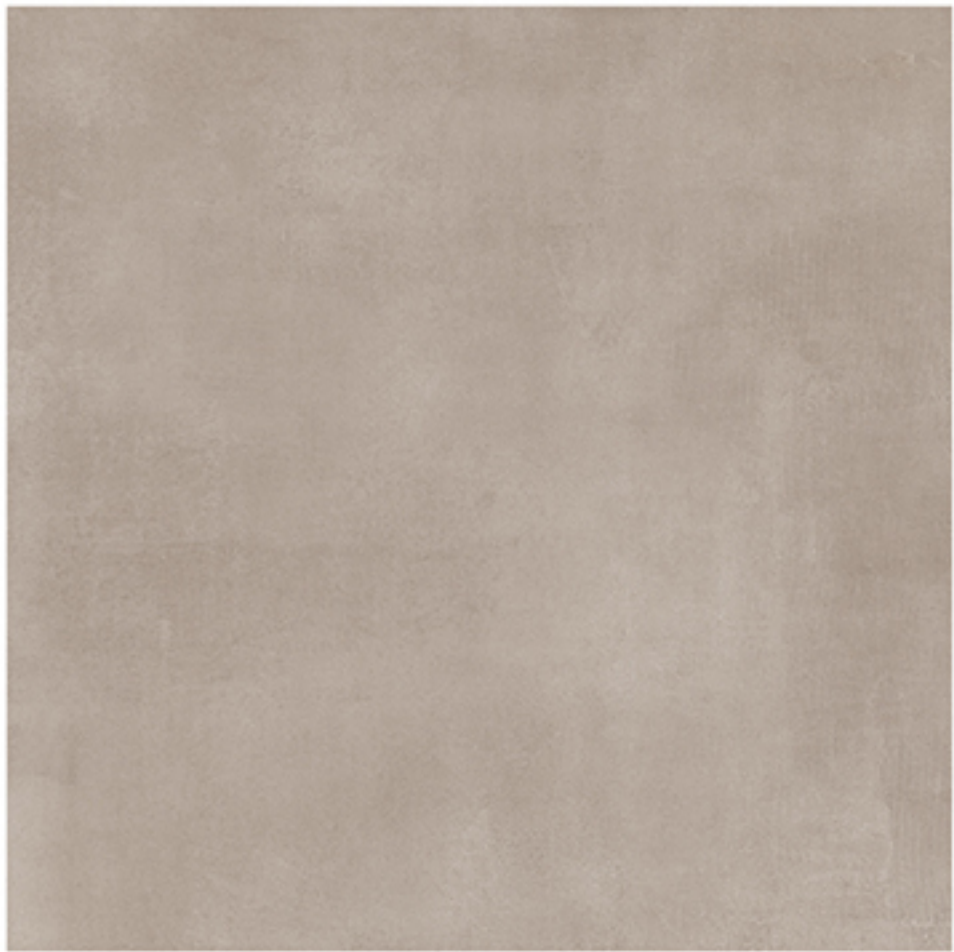

60x60cm




30x60cm



60x120cm



15x120cm

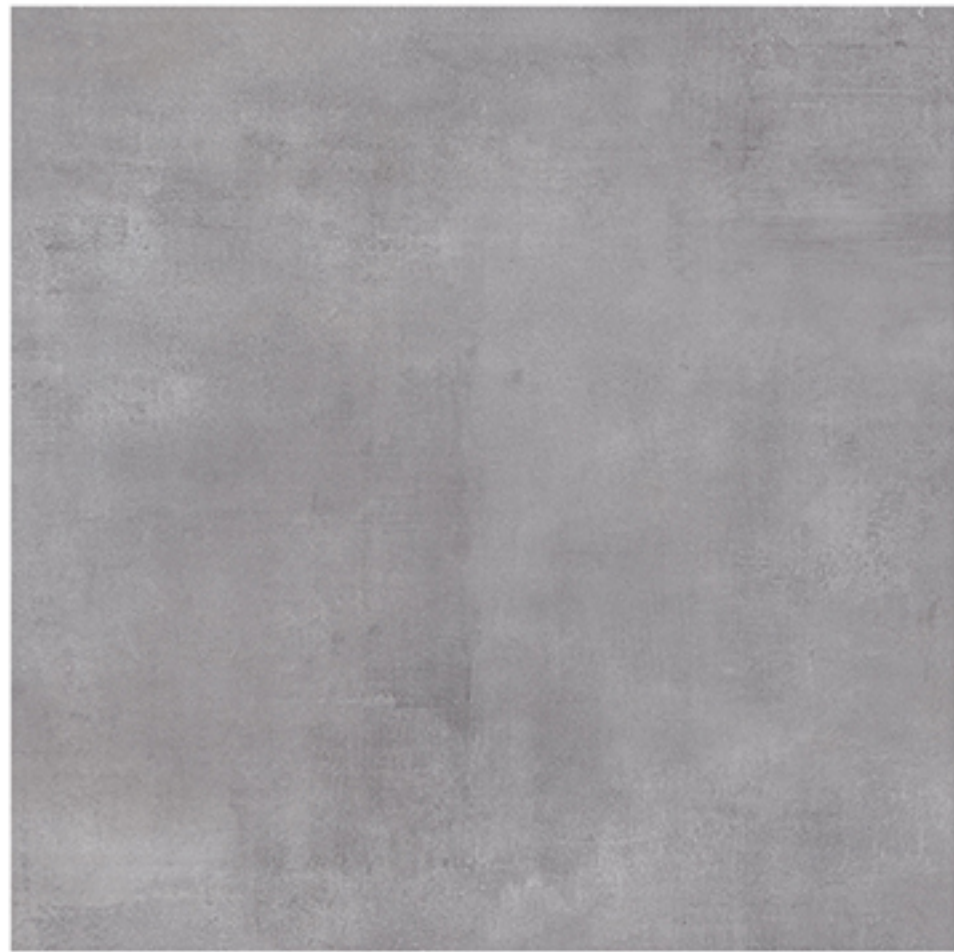

60x60cm



30x60cm



60x120cm



15x120cm



60x60cm



30x60cm

Caratteristiche tecniche / Technical characteristics			
UNE-EN ISO 10545	Test Standard ISO 13006-EN1441	Product Standard RIALTO VALUES	SOHO RIALTO VALUES
Caratteristiche dimensionali / Dimensional and surface appearance			
Spessore / Thickness	ISO 10545-2	± 5 %	± 3 %
Lunghezza e larghezza / Lenght and width	ISO 10545-2	± 0,5 %	± 0,2 %
Ortogonalità / Squareness	ISO 10545-2	± 0,6 %	± 0,2 %
Planarità / Surface flatness	ISO 10545-2	± 0,5 %	± 0,2 %
Proprietà fisiche / Phisical Properties			
Assorbimento d'acqua / Water absorption	ISO 10545-3	≤ 0,5 %	0,08 %
Resistenza a flessione N/mm ² / Moduls of rupture N/mm ²	ISO 10545-4	≥ 35 N/mm ²	42 N/mm ²
Sforzo di rottura N / Breaking strength N	ISO 10545-4	≥ 1300 N	2300 N
Resistenza agli sbalzi termici / Resistance to thermal shock	ISO 10545-9	REQUIRED	PASS
Resistenza al gelo / Frost resistance	ISO 10545-12	REQUIRED	PASS
Antiscivolo / Antislip 120x60/60x60/30/60	DIN51130	-	R9
Proprietà chimiche / Chemical properties			
Resistencia agli prodotti di pulizia e additivi / Resistence to household chemical and swimming pool	ISO 10545-13	Min. GB/UB	UA
Resistenza agli acidi ed alle basi (concentrazione leggera) / Resistance to acids and alkalis (low concentration)	ISO 10545-13	GLB/ULB	ULA
Resistenza agli acidi ed alle basi (concentrazione alta) / Resistanceto acids and alkalis (high concentration)	ISO 10545-13	GHB/UHB	UHA
Resistenza alle macchie / Resistanceto staining	ISO 10545-14	Min. 3	CLASS 5



JDD Industry Co., Limited
 JDD Building No. 9
 Taobo No. 1 Road,
 Nanzhuang Huaxia Ceramic City,
 Foshan 528061, China

info@rialto.com
 www.rialto.com