



RIALTO
porcellanato



www.rialto.com.cn

Stratus

STRATUS

Through the application of Stratus collection it is possible to provide a more contemporary character to classic spacesinto results that denote both timelessness and trendiness.

ORIGINAL




STR ORI60N 60x60cm/60x120cm
24"x24"/24"x48"

STR ORI60L 60x60cm/60x120cm
24"x24"/24"x48"

STR ORI60A 60x60cm/60x60**x2cm**(R11)
24"x24"/24"x24"(R11)

GREY

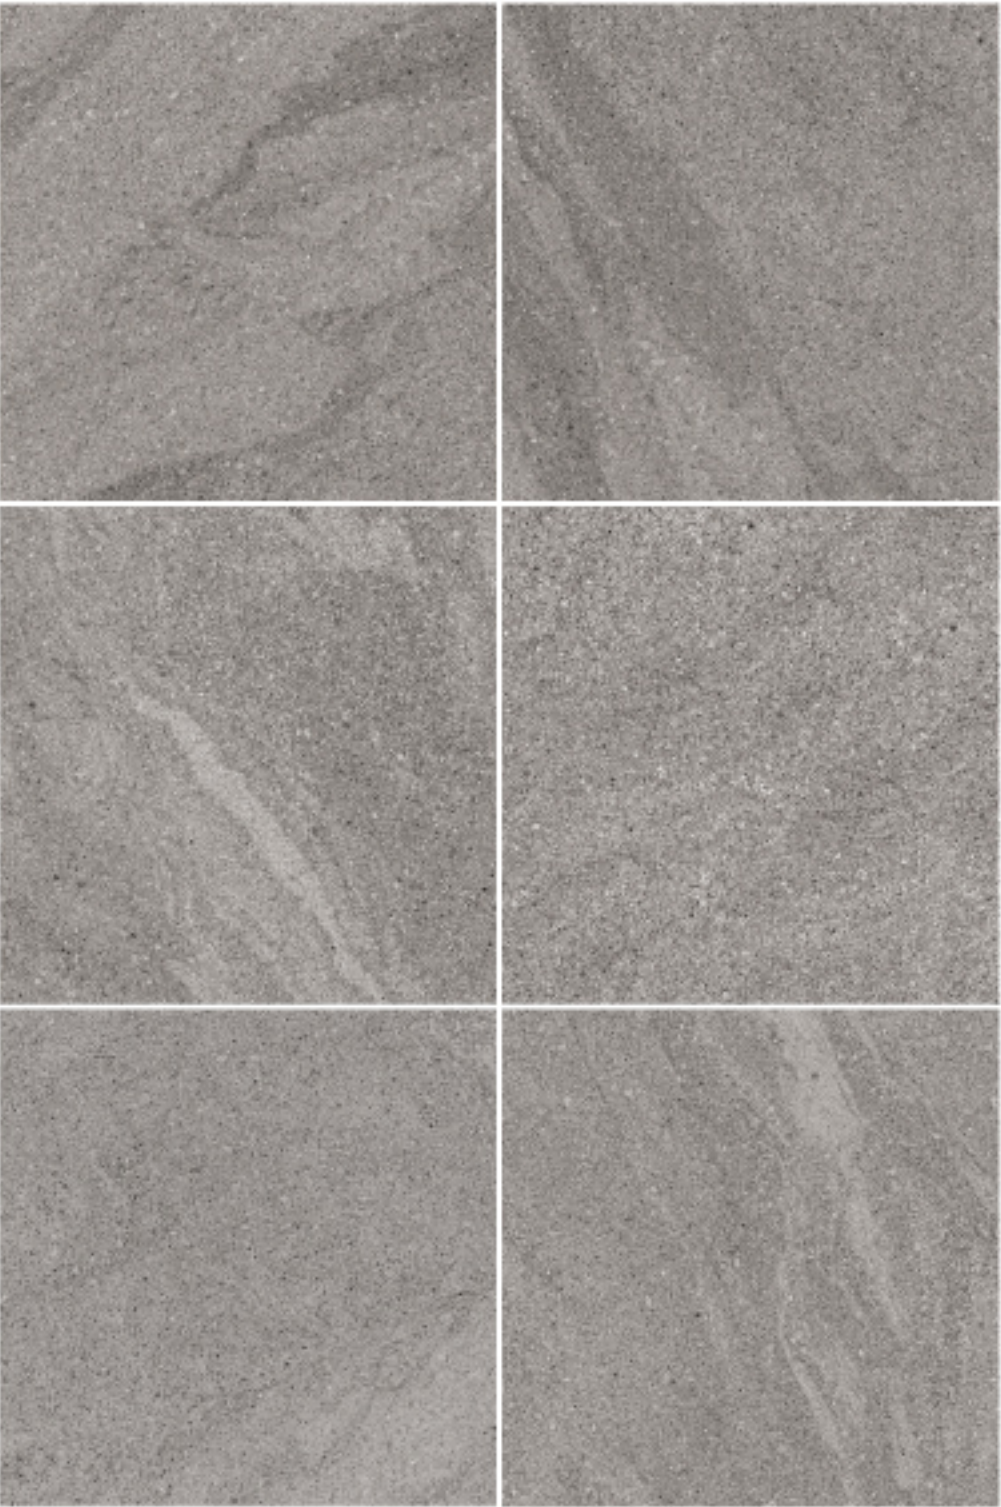


STR GRY61N 60x60cm/60x120cm
24"x24"/24"x48"

STR GRY61L 60x60cm/60x120cm
24"x24"/24"x48"

STR GRY61A 60x60cm/60x60**x2cm**(R11)
24"x24"/24"x24"(R11)

CHARCOAL

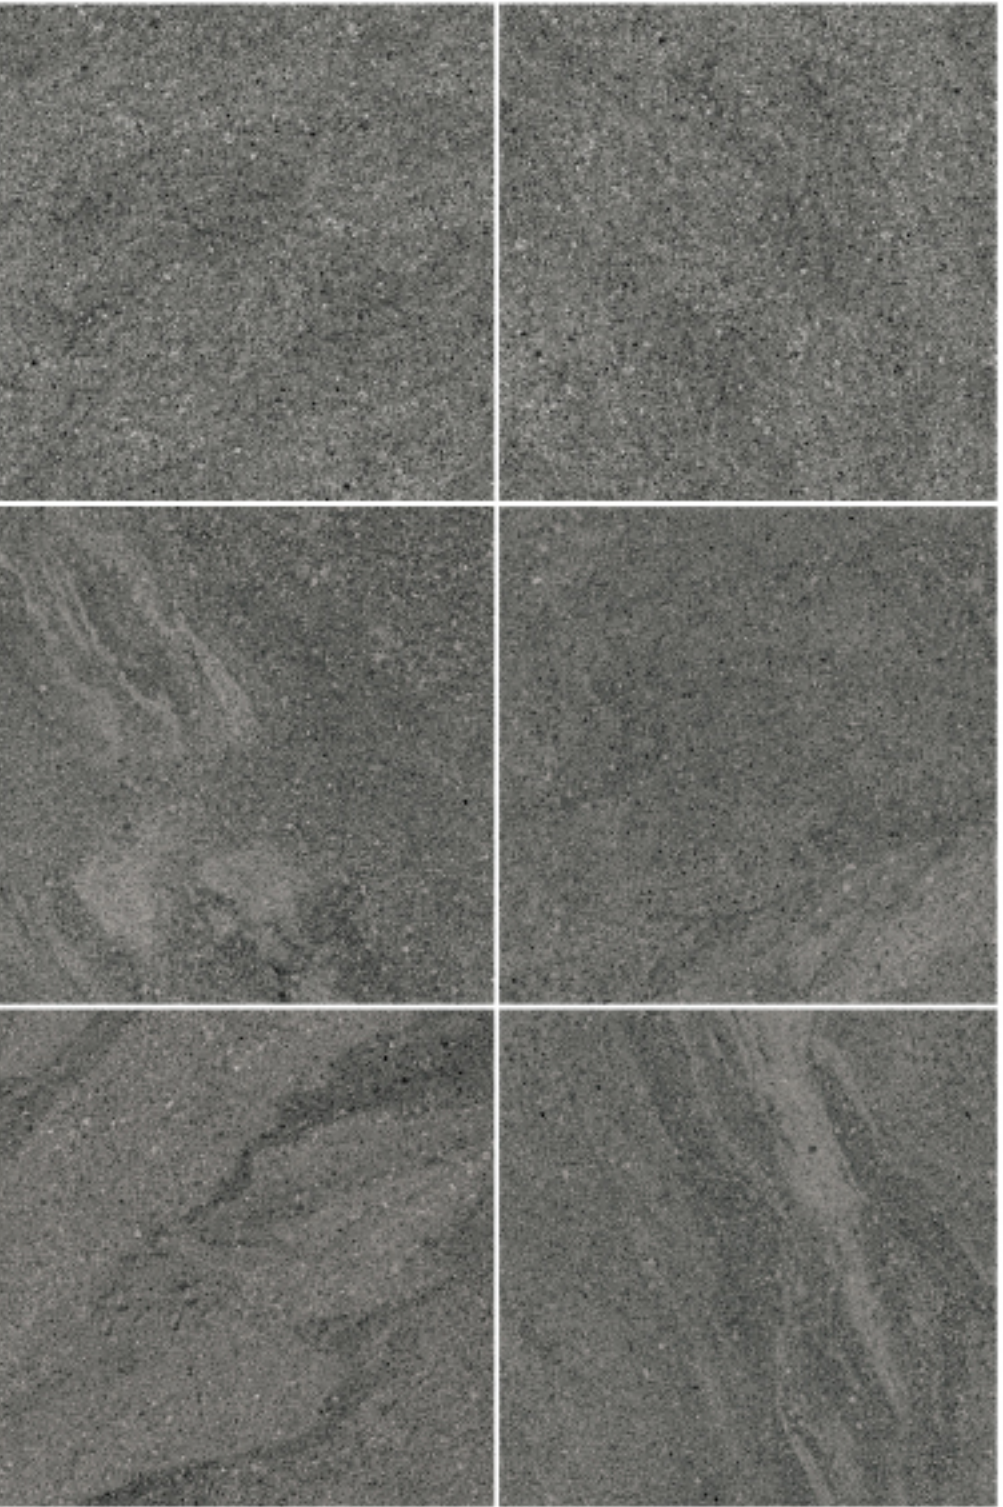

STR CHA62N 60x60cm/60x120cm
24"x24"/24"x48"

STR CHA62L 60x60cm/60x120cm
24"x24"/24"x48"

STR CHA62A 60x60cm/60x60**x2cm**(R11)
24"x24"/24"x24"(R11)

N

L

A

Natural

Lappato

Anti-Slip



FINISHES

This collection is available in **Natural**, **Lappato** and **Antislip** finishes.

COLOUR

The availablecolours are **Original**, **Grey** and **Charcoal**.

SIZE

Sizes available are 60x120cm, 60x60cm, and 60x60**x2cm**.
24"x48", 24"x24", and 24"x24"



GREY




60x60cm 24"x24"



30x60cm 12"x24"



60x120cm 24"x48"

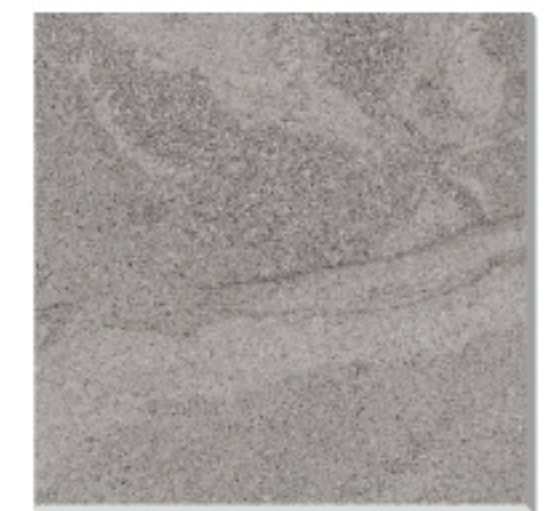

60x60x2cm(R11) 24"x24"

STR GRY61N.
60x120cm(24"x48")





STR GRY61N
60x120cm(24"x48")



STR GRY61A
60x60x2cm(24"x24")



STR GRY61N
60x60cm(24"x24")



ORIGINAL




60x60cm 24"x24"



30x60cm 12"x24"



60x120cm 24"x48"

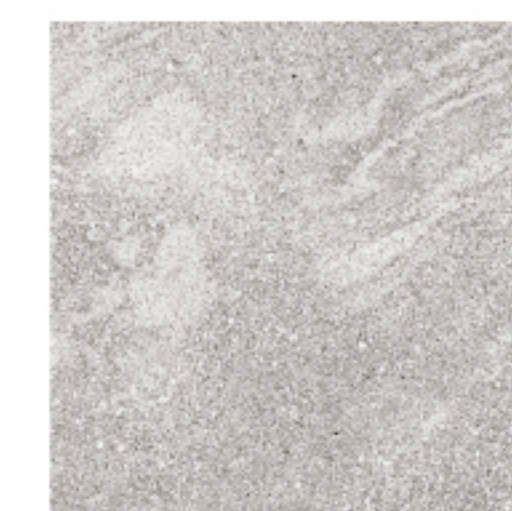


60x60x2cm(R11) 24"x24"


STR ORI60N
60x120/60x60cm
(24"x48"/24"x24")




CHARCOAL

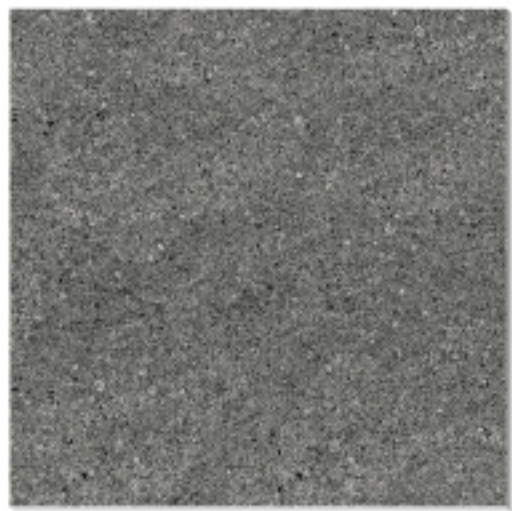


60x60cm 24"x24"

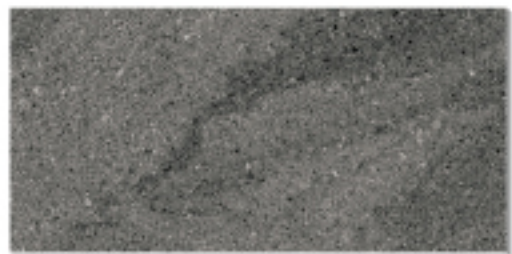

30x60cm 12"x24"

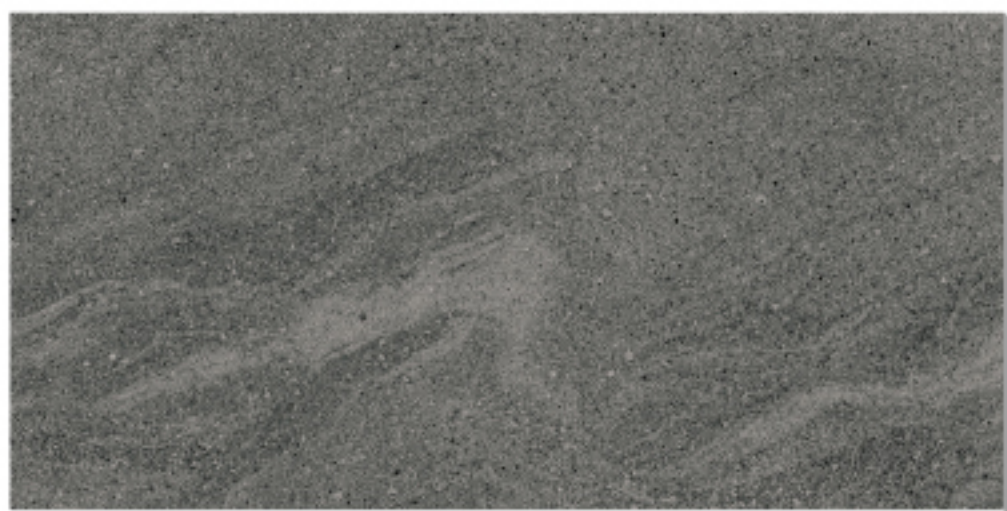

60x120cm 24"x48"

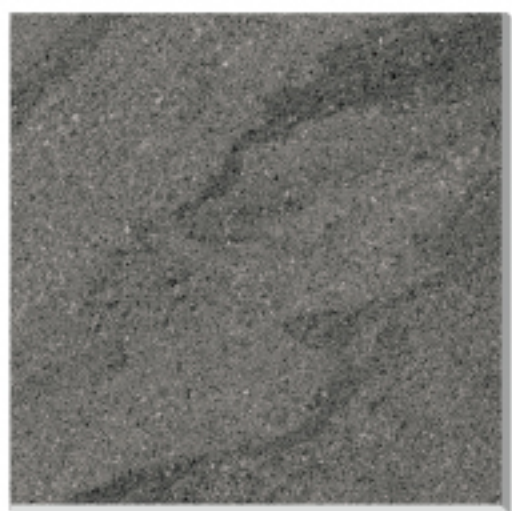

60x60x2cm(R11) 24"x24"




STR CHA62N
60x120/30x120/15x120cm
(24"x48"/12"x48"/6"x48")




STR CHA62N
60x60/30x60cm
(24"x24"/12"x24")

STAIRS CUSTOMIZED


Steps: 30x60cm, 30x120cm (12"x24"/12"x48")
Raisers: 15x60cm, 15x120cm (6"x24"/6"x48")
Skirting: 10x60cm, 10x120cm (4"x24"/4"x48")
Triangle Skirting: 15x30cm (6"x12")

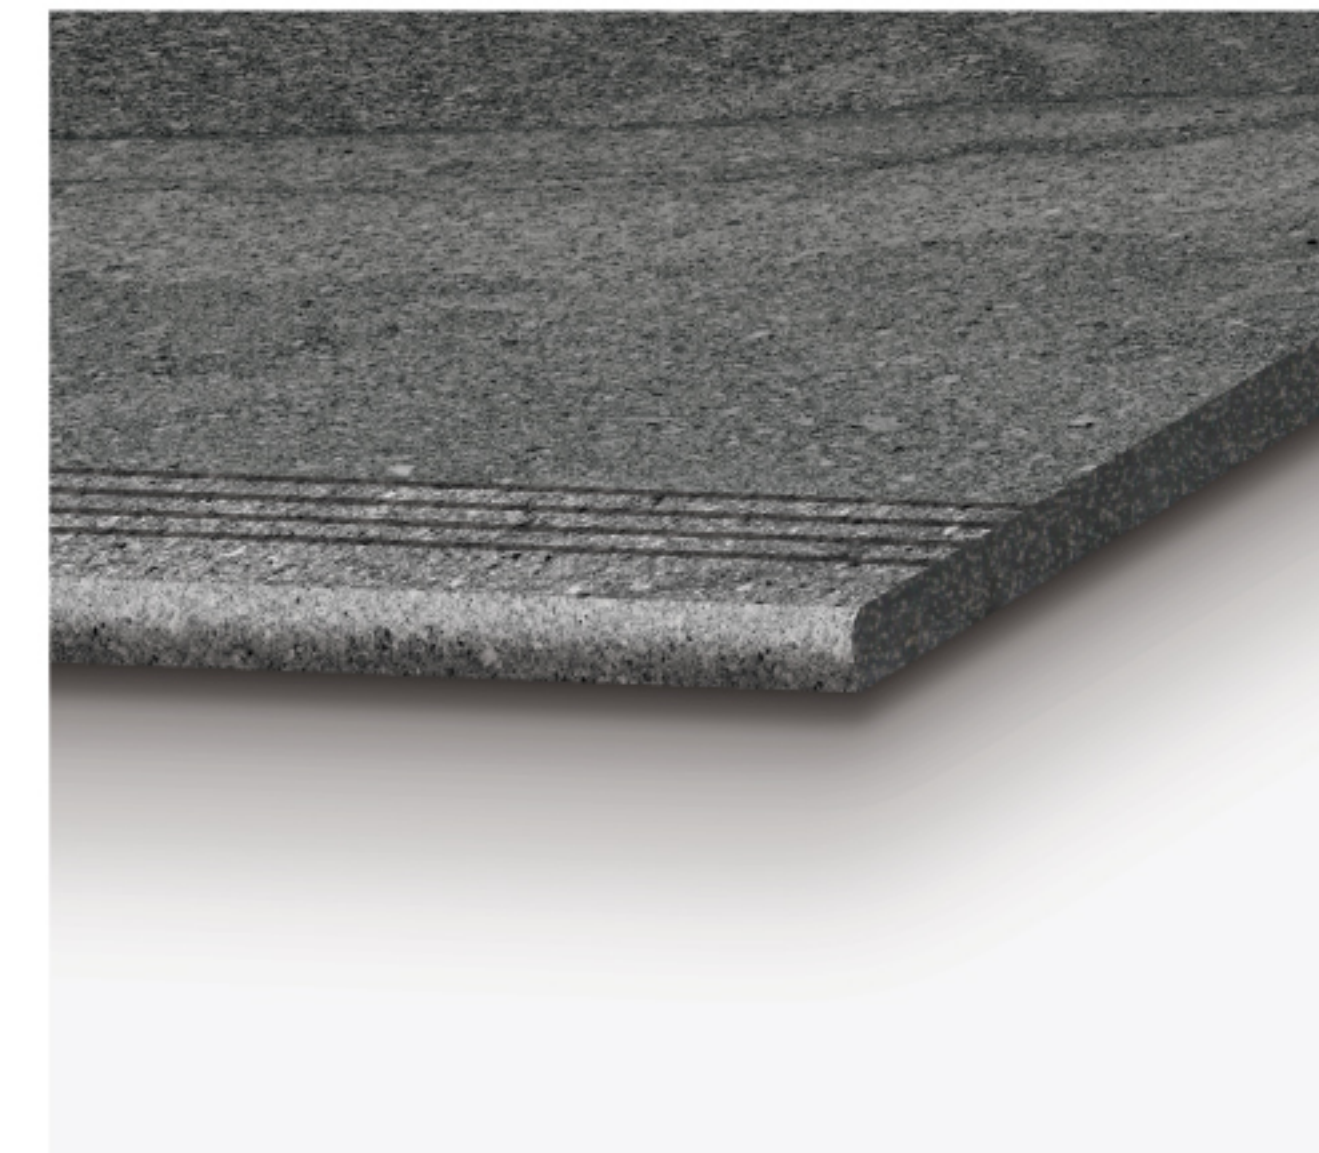


ACCESSORIES

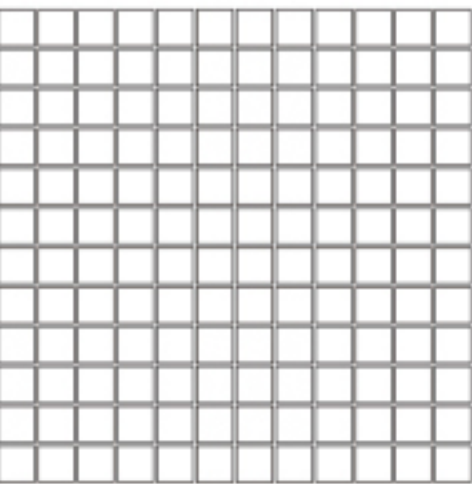


30x30cm 12"x12"
2.3X2.3CM

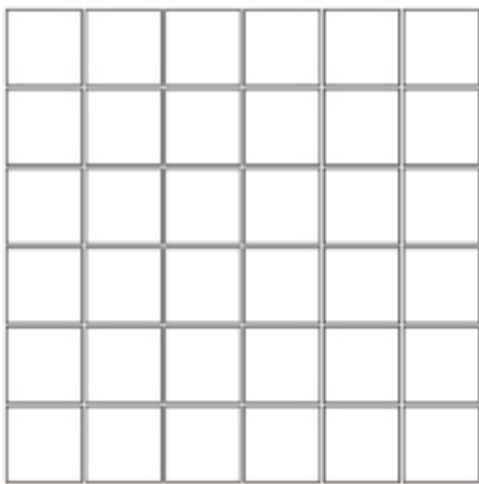

30x30cm 12"x12"
4.8X4.8CM

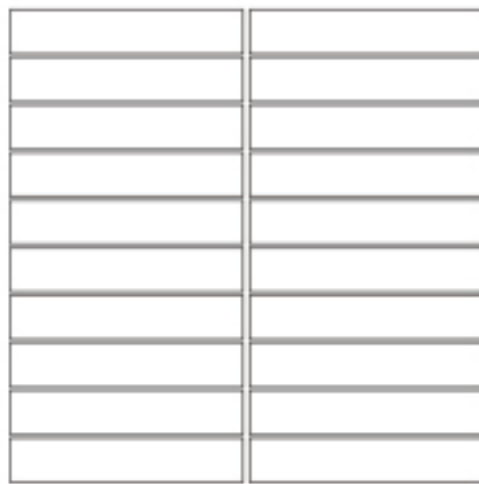


30x30cm 12"x12"
2.8X14.8CM

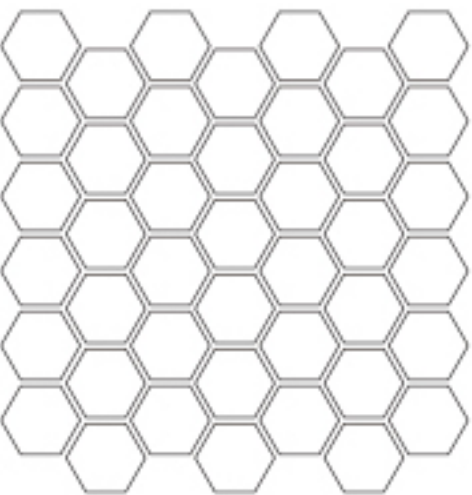

30.2x29.6cm 11.9"x11.7"
4.8X5.5CM




28.2x22.6cm 11.1"x8.9"
2.8X9.8CM

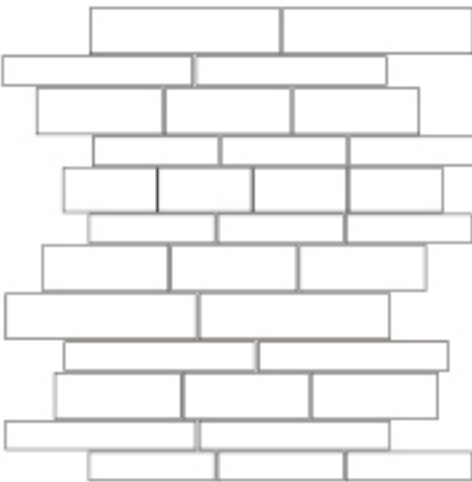

30x30cm 12"x12"



30x30cm 12"x12"

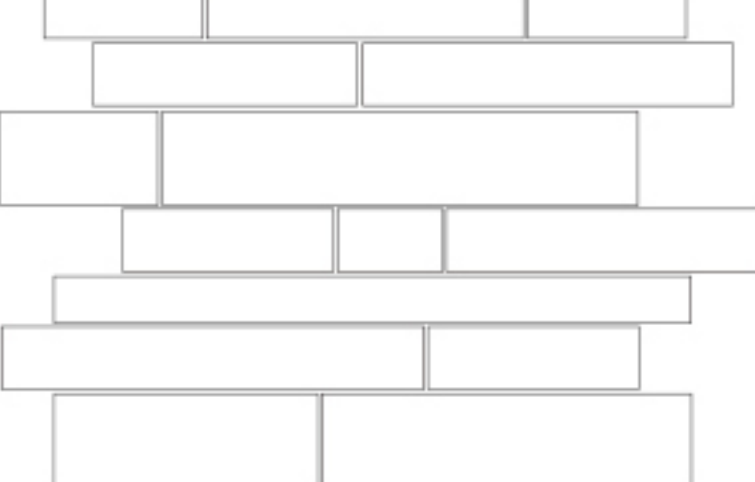

31.5x48.2cm 12.4"x19"

PACKING DETAILS

SIZE	PCS/BOX	KG/BOX	M2/BOX	BOX/PALLET	M2/PALLET	KG/PALLET
30X60cm 12"x24"	8	32	1.44	32	46.08	1024
60X60cm 24"x24"	4	32	1.44	32	46.08	1024
60X120cm 24"x48"	2	34	1.44	32	46.08	1088
60X60x2cm 24"x24"	2	34	0.72	32	23.04	1088

Caratteristiche tecniche / Technical characteristics

UNE-EN ISO 10545	Test Standard ISO 13006-EN1441	Product Standard RIALTO VALUES	STRATUS RIALTO VALUES	STRATUS x2 RIALTO VALUES
------------------	-----------------------------------	-----------------------------------	--------------------------	------------------------------------

Caratteristiche dimensionali /
Dimensional and surface appearance

Spessore / Thickness	ISO 10545-2	± 5 %	± 3 %	± 3 %
Lunghezza e larghezza / Lenght and width	ISO 10545-2	± 0,5 %	± 0,2 %	± 0,2 %
Ortogonalità / Squareness	ISO 10545-2	± 0,6 %	± 0,2 %	± 0,2 %
Planarità / Surface flatness	ISO 10545-2	± 0,5 %	± 0,2 %	± 0,2 %

Proprietà fisiche / Phisical Properties

Assorbimento d'acqua / Water absorption	ISO 10545-3	≤ 0,5 %	0,08 %	0,09 %
Resistenza a flessione N/mm ² / Moduls of rupture N/mm ²	ISO 10545-4	≥ 35 N/mm ²	42 N/mm ²	N/A
Sforzo di rottura N / Breaking strength N	ISO 10545-4	≥ 1300 N	2300 N	10000 N
Resistenza agli sbalzi termici / Resistance to thermal shock	ISO 10545-9	REQUIRED	PASS	PASS
Resistenza al gelo / Frost resistance	ISO 10545-12	REQUIRED	PASS	PASS
Antiscivolo / Antislip 120x60/60x60/30/60	DIN51130	-	R10	-
Ramp 60x60/60x60x2	DIN51130	-	R11	R11

Proprietà chimiche / Chemical properties

Resistencia agli prodotti di pulizia e additivi / Resistence to household chemical and swimming pool	ISO 10545-13	Min. GB/UB	UA	UA
Resistenza agli acidi ed alle basi (concentrazione leggera) / Resistance to acids and alkalis (low concentration)	ISO 10545-13	GLB/ULB	ULA	ULA
Resistenza agli acidi ed alle basi (concentrazione alta) / Resistance to acids and alkalis (high concentration)	ISO 10545-13	GHB/UHB	UHA	UHA
Resistenza alle macchie / Resistance to staining	ISO 10545-14	Min. 3	CLASS 5	CLASS 5